

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
1 March 2001 (01.03.2001)

PCT

(10) International Publication Number
WO 01/14028 A1

(51) International Patent Classification⁷: A63F 3/02, 3/00

(21) International Application Number: PCT/GB00/02863

(22) International Filing Date: 25 July 2000 (25.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
9919551.3 19 August 1999 (19.08.1999) GB

(71) Applicant and

(72) Inventor: HARPAZ, Yehouda [GB/GB]; 129 Corrie Road, Cambridge, Cambridgeshire CB1 3QQ (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 01/14028 A1

(54) Title: CONSTRUCTION OF GAMES GRID BOARD

(57) Abstract: A grid of points is constructed from the following four layers: A transparent membrane keyboard with a press-sensitive area at each grid point. A layer of a uniform, translucent material below the membrane keyboard. A separation layer of opaque material below the translucent layer, which for each grid point has a circular hole with reflecting or very light walls. A PCB below the separation layer, on which two or more light sources per grid point are mounted, and also carries the circuitry to drive them. The four layers are held together, and the thickness of the separation layer is such that the light sources are not immediately below the translucent area, but some distance away. The membrane keyboard and the control of the light sources are both connected to a CPU with some memory which uses them to manage various games and puzzles.

Construction of Games Grid Board

This invention is related to electronic games grid boards, in which players play by pressing a point in a grid of points on an electronic board, and the board displays the state of the game by illuminating some of the points. It describes a construction to achieve an implementation of the grid itself which is cheap and robust, feel good to play on and is visually attractive.

Electronic games boards like the ones which are described by Harpaz(1999, GB 9919551.3, a priority document of this application) are played by the users pressing points on the board, and in respond the board changes the illumination of some points. For their implementation, they require a grid of points (each of which will be referred to as *a grid point* in this text), each of which can sense when it is pressed, and can be illuminated by different colours. In addition, it needs some controller that *manages* the games and puzzles that the board can play, which means it is notified when a point is pressed, and changes the illumination of the points according to the rule of the current game. This invention is concerned with the implementation of the grid points.

The implementation of the grid points needs to be robust and cheap, feel good to play on and be visually appealing. In general, previous publications mostly assume that the illuminations will be done by LEDs, and the sensing of a press will be done either by a touch screen or by mechanical buttons. See for example:

Zeki <i>Et al</i>	International Publication Number	WO 97/26057
Weiner <i>et al</i>	US patent	5,573,245
Golad	International Publican Number	WO 98/19758

A touch screen seems to be too expansive and damage-sensitive to be really useful, and the few small toys which are already on the market and have such points seem to be all made of buttons. These are also relatively expensive, suffer mechanical wear, and it is difficult to illuminate the buttons in an attractive way. Additional problem with buttons is that they have to be pressed vertically, and when playing fast that is a problem for the players, because they have to move their hand horizontally to the right place and stop it to actually press the point.

A possible solution with current technology is to use membrane keyboard for the input, which solves the main problems of robustness and is relatively cheap. However, simply using a membrane keyboard above point light sources like LEDs does not look appealing. The main problems are that the illuminated area is not uniformly illuminated (it is brighter just above the light source, and there are also smaller inhomogeneities), and that if more than one light source is used, they illuminate somewhat different areas. The invention here describes a construction that gives an almost uniformly illuminated area, with more than one light source, and is based on standard and cheap components.

According to the current inventions, the grid of points is constructed from the following four layers:

- 1) A transparent membrane keyboard with a press-sensitive area at each grid point.
- 2) A layer of a uniform, translucent material below the membrane keyboard.
- 3) A separation layer of opaque material below the translucent layer, which for each grid point has a circular hole with reflecting or very light walls.
- 4) A PCB below the separation layer, on which two or more light sources per grid point are mounted, and also carries the circuitry to drive them.

The four layers are held together, and the thickness of the separation layer is such that the light sources are not immediately below the translucent area, but some distance away. The distance needs to be more than quarter of the diameter of the hole in the separation layer, and is typically 40-100% of the diameter of the hole. The membrane keyboard and the control of the light sources are both connected to a CPU with some memory which uses them to manage various games and puzzles.

Because the sources of light are not immediately below the translucent layer, the light spreads before it reaches the translucent layer, so the difference between the illumination in the centre of the illuminated area and in its periphery is not so marked. The sides of the holes reflect light that doesn't reach the translucent layer directly, and this reflected light is distributed homogeneously or even more at the periphery of the illuminated area, so makes the distribution of illumination more homogeneous. The translucent layer smoothes out short range changes in the illumination.

The overall result is illumination that still decrease from the point above the source of light, but the change is small and smooth. Outside the circle above the hole the illumination drops almost to zero, thus giving a circular and almost homogeneous illuminated area.

The membrane keyboard will also need some marking which shows the players where the grid points are even when they are not illuminated.

In contrast to keyboards that are used in working devices, for a playing board it is important that it is very easy to press a point, even if this leads to more erroneous presses. This allows the players to play fast and without concentrating on the accuracy of the movements that they perform. A possible way to achieve this is by making the press-sensitive area for each grid point much larger than the illuminated area.

Another possibility is to make the membrane keyboard with a dome for each point, rising above the surface. That makes it easier for the players to feel where they press. With the current technology it seems difficult to combine such domes with a large pressing area, but advances in the membrane keyboard technology may make it plausible in the near future.

The grid that is shown in the specific embodiment is a square grid, but the grid can have other arrangement, e.g. hexagonal, triangular or rectangular.

A specific embodiment of the invention will now be described with reference to the accompanying drawings:

Figure 1 Shows a sketch of a typical board from above

Figure 2 Shows a cross section through the a column of grid points in the board

Figure 3 Shows an expansion of one grid point.

Figure 1 shows the grid from above, so only the membrane keyboard and the illumination of grid points are visible. Unilluminated points are denoted by empty circles, and illuminated points are denoted one of two patterns, one for red and one for green. The membrane keyboard and translucent layer 1 are made together. The translucent layer is made of HIPS (High Impact PolyStyrene) and serves as the base layer for the layers carrying the circuitry of the keyboard. The layout of the membrane keyboard is specially designed for the board, but otherwise it is made by standard techniques.

The Membrane keyboard also has a graphic layer 2, which leaves the areas above the holes in the separation layer transparent 3, and is opaque in the rest of the surface of the board. This makes the borders of the points sharper. The press-sensitive area for one grid point is indicated in Figure 1 by the square in broken line 4. As discussed above it is much larger than the illuminated area of the grid point, to make it easier for the players to press a point.

The separation layer 5 is made of white harden foam. The walls of the holes 6 are smooth, so they also reflect some of the light. The PCB 7 is a standard PCB, and for each grid point it has two LEDs 8, one green and one red, and are mounted to project their light upwards.

The actual shape of the all the layers is rectangle, such that they extend more than the square grid of points to one direction. The CPU and memory 9 are mounted below the PCB at this region, and on the top there are input and display devices 10 to allow the players to control the games that the CPU manages. This regions also contains the electronic connection between the PCB and the membrane keyboard (not shown).

The LEDs produce a cone of light 11, and the thickness of the separation layer is such that the cone of light intersects the walls of the hole a small distance below the translucent layer. With this construction, the periphery of the illuminated area receives more reflected light from the top of the walls than the centre, thus increasing the homogeneity of the illumination. The LEDs are tilted slightly towards the centre, to compensate for the fact that they are not exactly in the middle of the hole. The two LEDs in each grid point can be switched on independently, so the grid points can be illuminated either by green or red, which are marked with different patterns in Fig 1.

The visual look of the board and the easiness of making moves make it very appealing for playing any game that can be played on it. A list of such games is given below. It is even better for games when time is important, either because the players have a limited time to make a move, or because the illumination of the points changes even when the players don't make a move, like in the games *Ghost*, *TouchIt*, *Life1* and *Life2* below (Life is a RTM). With existing constructions, these games would not be enjoyable to play.

Games implemented in the prototype of the Grid Board

The following 12 games have been implemented in the prototype of the board. Each game has several parameters that can be set, but only a minority of these are described here. Each two-players game can also be played against the board, and has a time limit for performing a move, which can be set by the players. With the default parameters settings, *Othello*, *CountLines* and *Visiput* flash the legal moves for a player that presses a point that is an illegal move.

1) *Othello*. 'Adding a stone' is done by pressing an unilluminated point. If this is a legal move, the CPU switches the point on with the current player's colour (which corresponds to putting a stone in this point) and reverses the colour of the points that need to be reversed according to the rules of OTHELLO. Because the number of points is 9x9 rather than the usual 8x8, the start up position is different from the standard starting position. In each move the CPU checks if the current player has a legal move, and if not passes the turn to the other player. If both players don't have a legal move, the CPU finishes the game. In OTHELLO, passing a move is actually illegal, but the time limit of a move means that a player may intentionally pass, which may be regarded as cheating. To get over this problem, a parameter called *Compensate* can be set, so when a player passes a move, the other player gets as a compensation more than one move.

2) *Ghost*. This is a fluid game. The board illuminates four points (the *Ghost*), and then moves the *Ghost*, by repeatedly switching on a point that is a neighbour of one of the illuminated points, and switching off one of the illuminated points. The players try to 'catch the *Ghost*', by pressing one of the points while it is illuminated

3) *Life1*. This is a fluid game, i.e. the state of the illumination of grid points changes even if the players do not play. Each fixed time period (*generation*, a settable parameter), the CPU checks for each point how many of the eight points around it are illuminated, and accordingly decides if the point is going to be illuminated in the next generation. Thus the pattern of illumination of the grid points changes each generation. In parallel, the player(s) can switch on or switch off points by pressing them.

Life1 can be played in a 'kill' mode, in which the player tries to 'kill' the board, i.e. switch off all the points, as fast as possible, or in 'keep alive' mode, in which the player tries to keep the board 'alive', i.e. keep at least some points on, as long as possible. Adjusting the various parameters makes the task an interesting challenge.

4) *Life2*. Like *Life1*, but there are points illuminated in either colour. The players play in turn, and each player tries to switch off all the points of the other colour.

5) *TouchIt*. Single player game, mainly testing reaction time and accuracy. The CPU switches on a few points (1-4) one after the other with a short time gap, and then switches them off. The player needs to press the last point that was switched on before the next point is switched on or all of them are switched off. By changing the time gap between switching the points on, the number of points and their pattern, the player can fit the game to his own level to make it a good challenge.

6) *Symmetry*. Single player game. The CPU switches on a pattern of points on one side of the grid, and the player needs to press the symmetry related points on the other side of the grid. Parameters like the number of points in the pattern, the time that is allowed for doing the copying and the kind of symmetry operation that the player need to do are used to match the difficulty level of the copying to the level of the player.

7) *ClearIt*. The game starts with an equal number of points illuminated in each of the two colours, but otherwise randomly distributed on the grid. Each player in his turn presses an empty point, and the CPU switches off all the points of the other player's colour which are a chess knight move away from the pressed point, and points of the current player's colour which are one diagonal move further. The winner is the player that switches off all the other player's points first.

8) *FindThem*. A memory game. In the beginning of the game the CPU switches on an equal number of points in both colours but in a random pattern for a short period of time, and then switches all of them off. Each player in turn tries to switch on a point of his own colour by pressing a point. If this point was switched on with his colour in the beginning, it is switched on. The winner is the player that first switches on 9 points.

9) *CountLines*. Each player in his turn switches on a point of his colour by pressing it. A player is not allowed to press in two successive turns two points that are too close to each other, and the distance that defines what is too close can be set by the players. The winner is the player that when all the points are switched on has the larger number of straight lines of four points of his colour.

10) *Visiput*. Each player in his turn switches on a point by pressing it. A player is allowed to press a point only if the point is 'visible' by points of his own colour at least as it is 'visible' by points of the other colour, where 'visible' means connected by a straight line of switched-off points. The winner is the player that succeeds to switch on more points. The CPU checks the games after each move, and if it can determine for each unilluminated point that only one player would be able to press it, it switches on all the unilluminated points to the colour of the player that can press it, and finishes the game, thus saving the players the boring task of switching all the unilluminated points after the result of the game is already known.

11) *Go*. The game is played according to the standard rules of GO. For each move, the board checks if it is legal, and rejects it otherwise. If the move captures points of the other players, the board switches them off. Like in *Visiput*, the CPU finishes the game when it is clear which part of the grid is controlled by whom. Because this is a complex operation in Go and the heuristics that are used may get it wrong, this feature is controlled by several settable parameters, and can also be switched off.


12) *FillIt*. Each player in his turn presses an empty point which causes a pattern of points around this point to be switched on with the player colour if they were off, or reverse their colour if they were on. The winner is the player that has more points when all the points are switched on.

Claims

- 1 A grid of grid points is constructed from the following four layers:
 - a transparent membrane keyboard with a press-sensitive area at each grid point;
 - a layer of a uniform, translucent material below the membrane keyboard;
 - a separation layer of opaque material below the translucent layer, which for each grid point has a circular hole with reflecting or very light walls;
 - a PCB below the separation layer, on which two or more light sources per grid point are mounted, and also carries the circuitry to drive them;where all the layers are held together, and the thickness of the separation layer is such that the distance of the light sources from the bottom of the translucent layer is more than a quarter of the diameter of the hole in the separation layer;
and both the membrane keyboard and the control of the light sources are connected to a CPU which uses them to manage various games and puzzles, in which the players play by pressing grid points, and the CPU responds by changing the illumination state of the sources of light.
- 2 A grid as described in claim 1, where the press-sensitive area is more than 1.5 times larger than the area of the hole in the separation layer.
- 3 A grid as described in any preceding claim, where the membrane keyboard has a graphic layer which leaves the areas above the holes transparent, and is opaque in the rest of the surface of the board.
- 4 A grid as described in any preceding claim, where the layer of translucent material is made of High Impact Polystyrene.
- 5 A grid as described in any preceding claim, where the membrane keyboard has a dome above the surface for each grid point.
- 6 A grid as described in any preceding claim, where in one or more games the state of illumination changes periodically even if the players do not press any point.
- 7 A grid as described in any preceding claim, where in one or more of the games in each period of time the CPU checks for each point how many of the eight points around it are illuminated, and accordingly decides if the point is going to be illuminated in the next period, the player(s) can also affect the illumination state of a point by pressing it, and the task of the player(s) is to keep some points illuminated as long as possible, or to cause all the points to be switched off as fast as possible.
- 8 A grid as described in any preceding claim, where in one or more of the games the CPU illuminates an additional point in each period of time, and the player(s) need to press the last point that became illuminated before the next point becomes illuminated.

- 9 A grid as described in any preceding claim, where in one or more of the games the CPU illuminates a pattern of points and then moves it in each period of time by switching on one point near one of the illuminated points and switching off one of the illuminated points, and the players need to press one of the points while it is illuminated.
- 10 A grid as described in any preceding claim, where one of the games is the game GO.
- 11 A grid as described in any preceding claim, in which one of the game has these rules:
Each player in his turn switches on a point of his colour by pressing it;
A player is not allowed to press in two successive turns two points that are too close to each other, and the distance that defines what is too close can be set by the players;
The winner is the player that when all the points are switched on has the larger number of straight lines of four points of his colour.

Fig 1 1/2

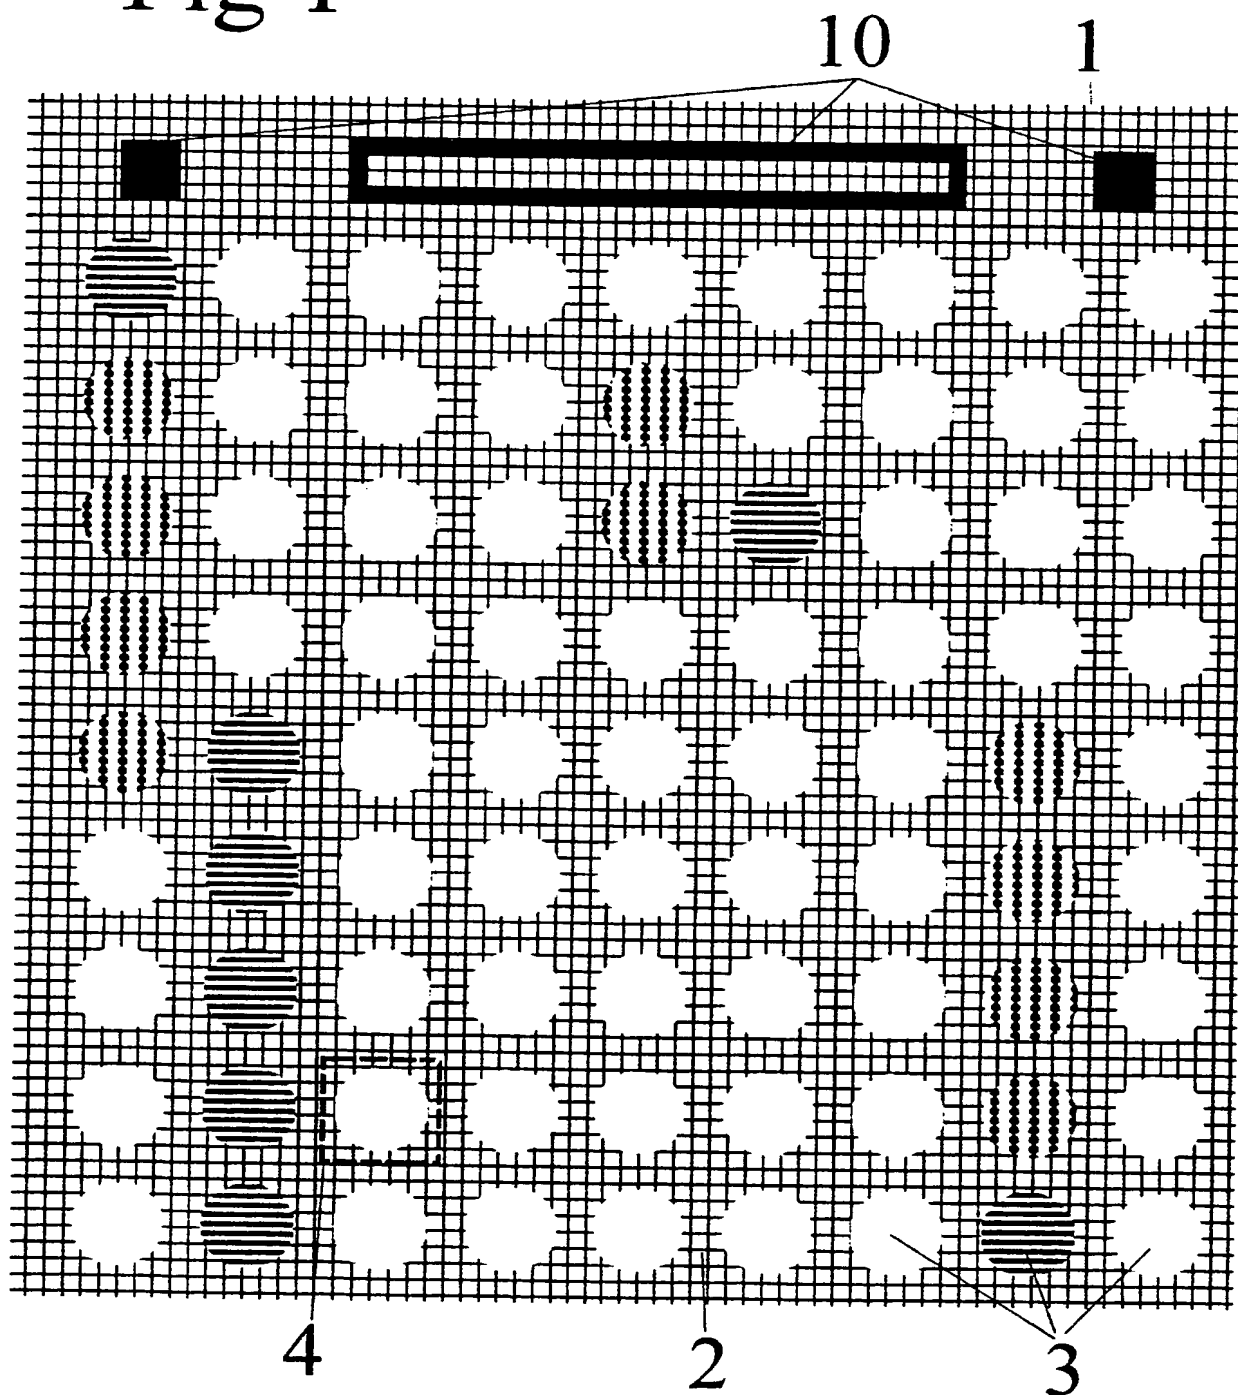

2/2

Fig 2


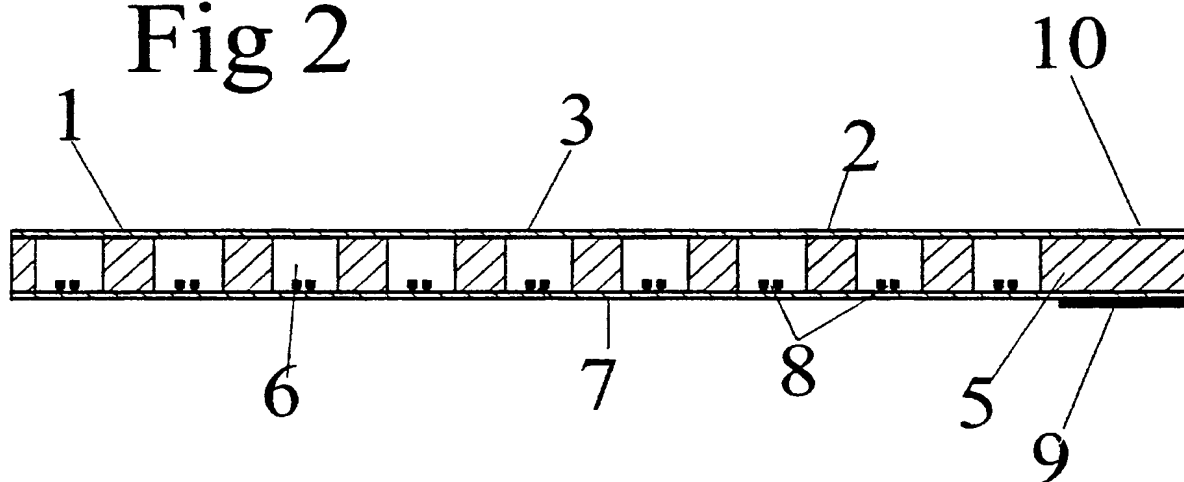


Fig 3

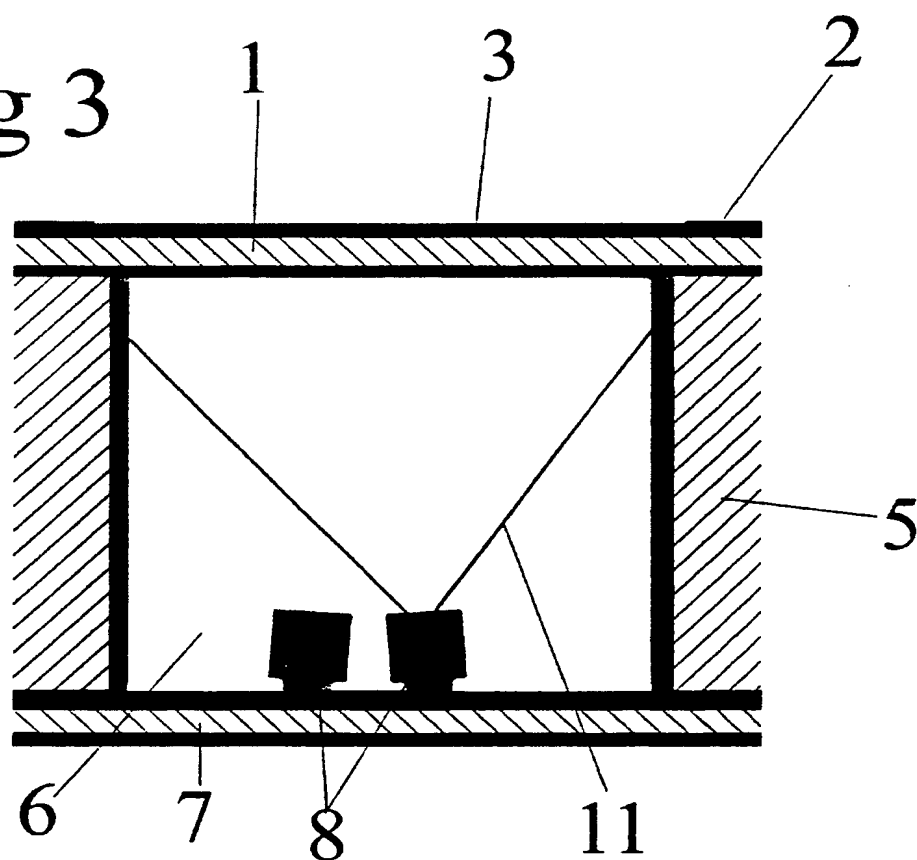

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/02863

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A63F3/02 A63F3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A63F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 19758 A (GOLAD) 14 May 1998 (1998-05-14) cited in the application the whole document ---	1
A	GB 2 019 226 A (ATARI) 31 October 1979 (1979-10-31) page 1, line 68 - line 100 page 1, line 114 -page 2, line 8 claims 1-5; figure 1 ---	1
A	US 4 244 635 A (SASAKI ET AL.) 13 January 1981 (1981-01-13) the whole document ---	1
A	WO 99 00165 A (WEINER ET AL) 7 January 1999 (1999-01-07) figures ---	1
-/--		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

18 September 2000

Date of mailing of the international search report

26/09/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Raybould, B

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 00/02863

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 97 26057 A (TIGER ELECTRONICS) 24 July 1997 (1997-07-24) cited in the application the whole document -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/02863

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9819758	A	14-05-1998	NL 1004407 C AU 4728297 A CN 1235558 A EP 0935491 A	08-05-1998 29-05-1998 17-11-1999 18-08-1999
GB 2019226	A	31-10-1979	DE 2915137 A JP 54140631 A	25-10-1979 01-11-1979
US 4244635	A	13-01-1981	NONE	
WO 9900165	A	07-01-1999	AU 7955598 A	19-01-1999
WO 9726057	A	24-07-1997	US 5743796 A AU 7430796 A	28-04-1998 11-08-1997